

2x6 TUNING FORK(KHZ)

•Part Number Guide

DX-T-F-LC-FT-OT

- T (Type型号) :WB=2×6 Tuning Fork
- F (Frequency标称频率)
- LC (Load Capacitance负载电容) :12.5=12.5pf 00=series, etc
- FT (Frequency Tolerance调整频差) :30=±30 ppm, etc
- OT (Operating Temperature工作温度) :1060=-10℃ to +60℃ 4085=-40℃ to +85℃, etc
- ESR (Equivalent Series Resistance等效阻抗)
- TR (Tape and Reel编带) OR B (Bulk Pack散装)
- G (Gull Wing夹持器)
- S (Special Requirement特殊要求)


•Electrical Specifications 电气参数

型号	Holder Type	Turning Fork 206(KHZ)
频率范围	Frequency Range	30,000KHz to 200,00KHz
调整频差	Frequency Tolerance (△F) (at25℃)	±10ppm to ±100ppm
频率温度系数	Parabolic curvature constant	[-0.035±0.01]ppm/℃ ²
工作温度范围	Operating Temperature Range	-10℃ ~ +60℃ to -40℃ ~ +85℃
老化	Aging (at 25℃)	±5ppm/year Maximum
保存温度范围	Storage Temperature Range	-40℃ to +85℃
静电容	Shunt Capacitance (C0)	1.55pF Typical
动电容	Motional Capacitance (C1)	2.5fF Typical
激励功率	Drive Level	1μW Maximum
绝缘阻抗	Insulation Resistance (Rs)	500 Megaohms Minimum at D.C 100V
负载电容	Load Capacitance (CL)	Suggested by customer



•Equivalent Series Resistance and Mode of Operation
 等效阻抗和振荡模式

Frequency Range 频率范围	ESR (Ω) 等效阻抗
30,000 — 40,000KHz	40KMAX
40,000 — 60,000KHz	30KMAX
60,000 — 70,000KHz	25KMAX
70,000 — 100,00KHz	22KMAX
100,00 — 200,00KHz	20KMAX

•Frequency vs.Temperature Curve
 频率温度曲线

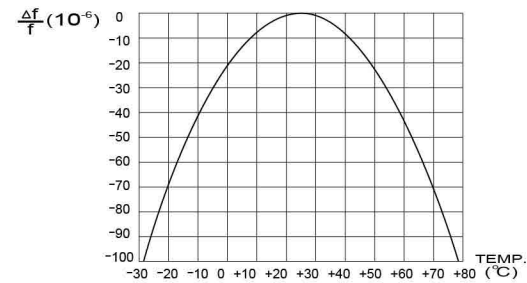

•Mechanical Dimensions 外型尺寸

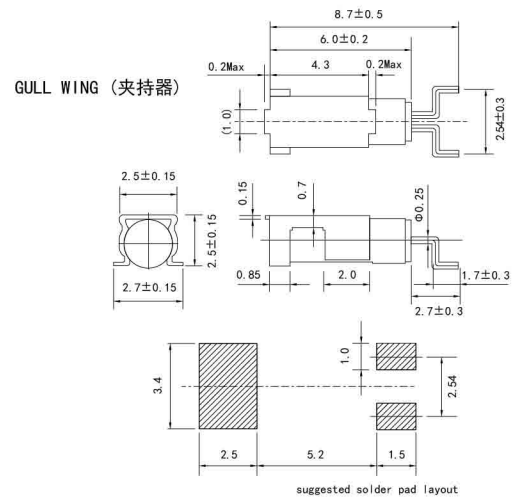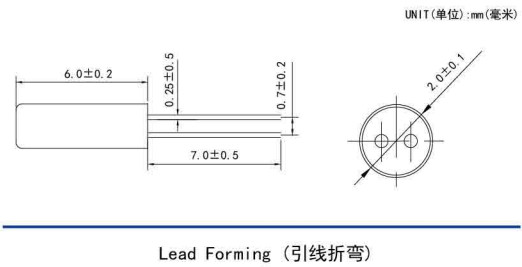

•Reflow Condition 回流焊条件

